查询RQS-0905P供应商

Features

Unregulated Converters

- 1kVDC Isolation
- Internal SMD Construction
- UL94V-0 Package Material
- Optional Continuous Short Circuit Protected
- Efficiency to 80%

ECONOLINE

DC/DC-Converter

RQS & RQD Series

0.25 Watt SMD Single & Dual Output

Selection Guide

Part Number SMD	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)
RQS-xx1.8	1.8, 3.3, 5, 9, 12, 15, 24	1.8	139	70
RQS-xx3.3	1.8, 3.3, 5, 9, 12, 15, 24	3.3	76	65-70
RQS-xx05	1.8, 3.3, 5, 9, 12, 15, 24	5	50	66-72
RQS-xx09	1.8, 3.3, 5, 9, 12, 15, 24	9	28	70-72
RQS-xx12	1.8, 3.3, 5, 9, 12, 15, 24	12	21	70-72
RQS-xx15	1.8, 3.3, 5, 9, 12, 15, 24	15	17	70-76
RQS-xx24	1.8, 3.3, 5, 9, 12, 15, 24	24	10	70-80
RQD-xx1.8	1.8, 3.3, 5, 9, 12, 15, 24	±1.8	±70	70
RQD-xx3.3	1.8, 3.3, 5, 9, 12, 15, 24	±3.3	±38	65-70
RQD-xx05	1.8, 3.3, 5, 9, 12, 15, 24	±5	±25	66-72
RQD-xx09	1.8, 3.3, 5, 9, 12, 15, 24	±9	±14	70-72
RQD-xx12	1.8, 3.3, 5, 9, 12, 15, 24	±12	±11	70-72
RQD-xx15	1.8, 3.3, 5, 9, 12, 15, 24	±15	±9	70-76
RQD-xx24	1.8, 3.3, 5, 9, 12, 15, 24	±24	±5	70-80

xx = Input Voltage

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RQS-051.8/P, RQD-051.8/P

Specifications (Core Operating Area)

Input Voltage Range		±10%
Output Voltage Accuracy		±5%
Line Voltage Regulation		1.2%/1% of Vin typ.
Load Voltage Regulation (10% to 100% full load)	1.8V, 3.3V output types 5V output type 9V, 12V, 15V, 24V output types	20% max. 15% max. 10% max.
Output Ripple and Noise (20MHz limited)		100mVp-p max.
Operating Frequency		50kHz min. / 100kHz typ. / 105kHz max.
Efficiency at Full Load		65% min. / 75% typ.
No Load Power Consumption		45mW min. / 75mW typ. / 105mW max.
Isolation Voltage Rated Working Voltage	(tested for 1 second) (long term isolation)	1000VDC min. see Application Notes
Isolation Capacitance		25pF min. / 82pF max.
Isolation Resistance		10 GΩ min.
Short Circuit Protection P-Suffix		1 Second Continuous
Operating Temperature Range (free air convection)		-40°C to +85°C (see Graph)
Storage Temperature Range		-55°C to +125°C
Reflow Temperature	ROHS compliant	245°C (30 sec) max. (for more details see Application Notes)
Relative Humidity		95% RH
Package Weight	RQS types RQD types	1.5g 2.2g
MTBF (+25°C) } *Detailed Information see Application Notes chapter "MTBF"*	using MIL-HDBK 217F	1345 x 10^3 hours
(+85°C) }	using MIL-HDBK 217F	310 x 10^3 hours

Derating-Graph

(Ambient Temperature)

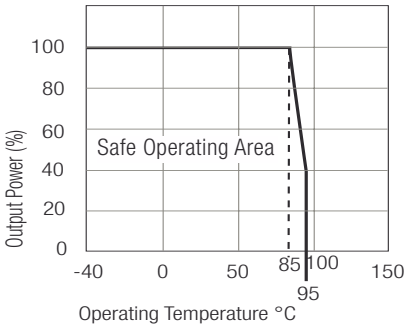

Typical Characteristics

RQS/RQD-xx05

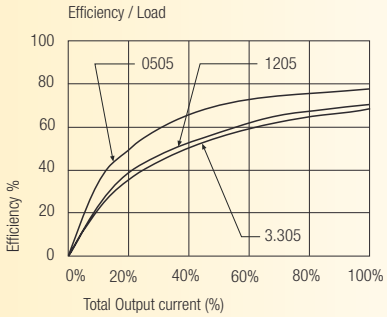

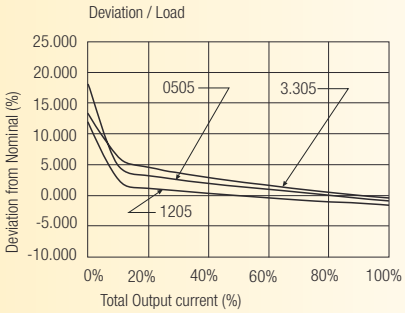

RQS/RQD-xx09

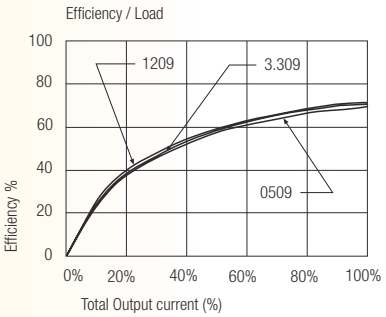

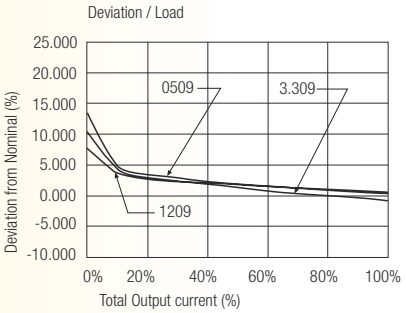

RQS/RQD-xx12

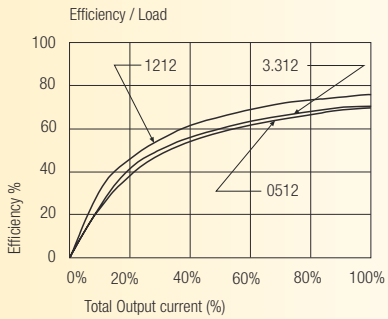

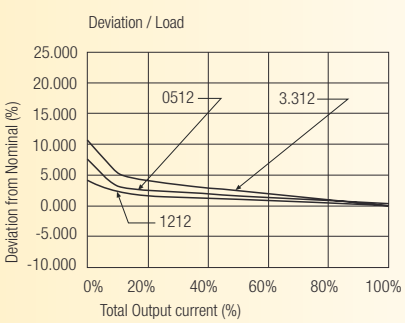

RQS/RQD-xx15

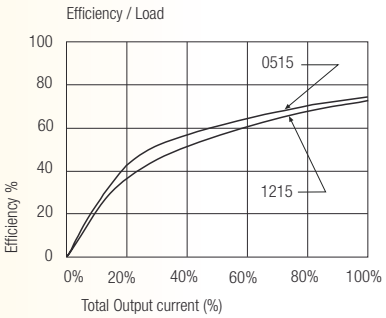

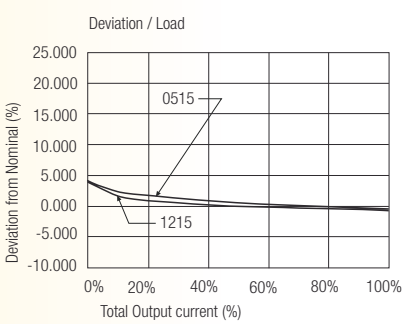

Package Style and Pinning (mm)

3rd angle projection

8 PIN SMD Package









Recommended Footprint Details



Pin Connections

Pin #	Single
1	–Vin
2	+Vin
4	–Vout
5	+Vout
8	NC

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

10 PIN SMD Package









Recommended Footprint Details



Pin Connections

Pin #	Dual
1 {	–Vin
2	+Vin
4	Com
5	–Vout
7	+Vout
10	NC

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm